



Light Source

Bridgelux

MacAdam Ellipse

2-Step | 1 step on request

Material

Extruded AL + PC Reflector

Degree of Protection

IP40

Color Temperature



2700K | 3000K | 4000K

CRI


97 | 90 | 80

Beam Angle


15° | 28° | 40° | 60°




Article No	LED	P(W)	CC(mA)	Voltage(V)	Angle(°)	CCT(K)	CRI	Flux(lm)	ErP Rating
M-6-40-27-80	V8	6.1	350	17.4	40	2700	80	750	E
M-6-40-30-80	V8	6.1	350	17.4	40	3000	80	790	E
M-6-40-27-90	V8	6.1	350	17.4	40	2700	90	680	F
M-6-40-30-90	V8	6.1	350	17.4	40	3000	90	700	F
M-9-40-27-80	Vero 10	8.9	350	25.3	40	2700	80	1080	F
M-9-40-30-80	Vero 10	8.9	350	25.3	40	3000	80	1160	E
M-9-40-27-90	Vero 10	8.9	350	25.3	40	2700	90	890	F
M-9-40-30-90	Vero 10	8.9	350	25.3	40	3000	90	990	F
M-9-40-27-97	Décor 10 Ultra	8.9	350	25.3	40	2700	97	790	G
M-9-40-30-97	Décor 10 Ultra	8.9	350	25.3	40	3000	97	850	G




M-6-15-30-90




M-6-28-30-90




M-6-40-30-90




M-6-60-30-90




M-9-15-30-90





M-9-28-30-90



M-9-40-30-90



M-9-60-30-90

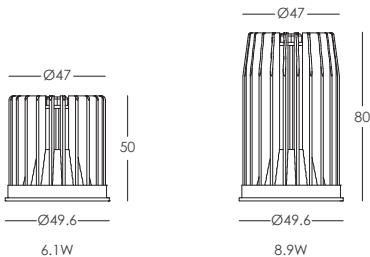

	Article No.	Dimming	Input Voltage	Output Power	Output Current	Output Voltage	Dimensions(mm)	IP Rating
	MINI-10-350	-	220-240V	5-10W	350mA	15-29V	58x36x20	IP65
	180mm 0.5mm2 VDE brown/blue wires with Wago connectors 221-413 for AC							
	180mm 0.3mm2 UL red/black wires with female connector for DC output							
	MINI-10-350T	Triac	220-240V	5-10W	350mA	14-29V	58x36x20	IP65
	180mm 0.5mm2 VDE brown/blue wires with Wago connectors 221-413 for AC							
	180mm 0.3mm2 UL red/black wires with female connector for DC output							
	D35009NTF	Triac	220-240V	4.5-9W	350mA	13-26V	109*40*22	IP20
	180mm 0.5mm2 VDE brown/blue wires with Wago connectors 221-413 for AC							
	200mm 0.3mm2 UL red/black wire with female connector for DC output							
	IE-12D	DALI	220-240V	max. 12W	180-500mA	18-54V	119*52*22.5	IP20
	200mm 1.5mm2 black solid wires with Wago connector 221-412 for DALI							
	200mm 1.5mm2 brown/blue wires with Wago connectors 221-413 for AC							
	200mm 0.3mm2 UL red/black wires with female connector for DC output							
	SE-12-100-400-W1D	DALI	100-240V	max. 12W	100-400mA	10-42V	135*30*20	IP20
	200mm 1.5mm2 black solid wires with Wago connector 221-412 for DALI							
	200mm 1.5mm2 brown/blue wires with Wago connectors 221-413 for AC							
	200mm 0.3mm2 UL red/black wires with female connector for DC output							
	SRP-2305-10CC350-700	DALI	200-240V	Max. 10W	350-700mA	6-28V	103.7*52.6*30	IP20
	200mm 1.5mm2 black solid wires with Wago connector 221-412 for DALI							
	200mm 1.5mm2 brown/blue wires for with Wago connectors 221-413 for AC							
	200mm 0.3mm2 UL red/black wires with female connector for DC output							